Product data sheet

Specifications



Altivar Soft Starter ATS130, 38A, 200 to 480V AC, control supply 24V DC

ATS130N2D38LT

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Altivar Soft Starter ATS130
Product or Component Type	Soft starter
Product destination	Asynchronous motors
Product Specific Application	Simple machine
Device short name	ATS130
Phase	3 phase
Utilisation category	AC-53A
Ue power supply voltage	200...480 V - 15...10 %
power supply frequency	50...60 Hz +/- 5 Hz
[Ie] rated operational current	38 A in line 104 °F (40 °C))
Service factor at Ie	100
Torque control	False
IP Degree of Protection	IP20
Motor power kW	11 kW 230 V normal duty 18.5 kW 400 V normal duty 22 kW 440 V normal duty
Maximum Horse Power Rating	10 hp 200 V normal duty 10 hp 208 V normal duty 10 hp 230 V normal duty 25 hp 460 V normal duty

Complementary

Overload current profile	300 % Ie for 5 s
On-load factor	70 %
Operating cycles/hour	50 cyc/h
Minimum motor current	20 % Ie
Device connection	In line
[Us] control circuit voltage	24 V DC +/- 10 %
Control power	21.6 W starting and stopping 3 W steady state
Integrated motor overload protection	False
Protection type	Phase failure mains Thermal protection starter Bypass error starter Control voltage Us starter
[In] Rated current pwr loss specifctn	38.0 A

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Power loss static current independent	3 W
Power loss per device current dependent	7 W
Power loss during starting	220 W 300 % Ie
Standards	EN/IEC 60947-4-2 UL 60947-4-2 IEC 60664-1
Product Certifications	CE UKCA CCC RCM EAC UL
Marking	CE CCC UKCA RCM EAC
[Uc] control circuit voltage	24 V DC
Discrete input number	3
Discrete input type	DI) digital input, 10 kOhm DI2) digital input, 10 kOhm BOOST) digital input, 10 kOhm
Input compatibility	discrete input level 1 PLC EN/IEC 61131-2
Discrete input logic	Digital input 0...< 5 V <= 0.2 mA > 13 V, >= 0.5 mA
Relay output number	1
Relay output type	Relay outputs R1A, R1C NO
Minimum switching current	2.5 mA 24 V DC relay outputs
Maximum switching current	On resistive load for relay outputs : 1 A 250 V AC 400000 cycles On resistive load for relay outputs : 1 A 30 V DC 400000 cycles On inductive load for relay outputs : 1 A 250 V AC cos phi = 0.4 100000 cycles On inductive load for relay outputs : 1 A 30 V DC cos phi = 0.4 100000 cycles
Discrete output number	1
Discrete output type	Non programmable digital output DQ1 <= 30 V 200 mA
Display type	1 LED Green)control power energized 1 LED yellow and red)motor operation phases, errors
Display screen available	False
Operating position	Vertical +/- 30 degree
Height	6.5 in (166 mm)
Width	2.2 in (55 mm)
Depth	6.5 in (165 mm)
Net Weight	2.9 lb(US) (1.3 kg)
Suitable for mounting onto standard rails	True
Function Available	Deceleration voltage ramp Boost
internal bypass	True
material declaration	True

Environment

Pollution degree	Level 2

environmental class (during operation)	Without salt mist 3C3 IEC 60721-3-3 3S3 IEC 60721-3-3
[Uimp] rated impulse withstand voltage	4 kV
[Ui] Rated Insulation Voltage	480 V
Electromagnetic compatibility	Conducted and radiated emissions level B conforming to IEC 60947-4-2 Short voltage interruptions level 3 conforming to IEC 61000-4-11 Electrostatic discharge level 2 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 1 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 2 conforming to IEC 61000-4-4 Oscillatory waves immunity level 3 conforming to IEC 61000-4-12 Voltage/current impulse level 2 conforming to IEC 61000-4-5 Conducted disturbances, induced by radiofrequency fields level 1 conforming to IEC 61000-4-6
Ambient air temperature for operation	14…104 °F (-10…40 °C) (without derating) 104…140 °F (40…60 °C) (with current derating 1.5 % per °C)
Ambient Air Temperature for Storage	-13…158 °F (-25…70 °C)
Ambient air transport temperature	-40…158 °F (-40…70 °C)
Operating altitude	0...3280.84 ft (0...1000 m) without derating 3280.84...13123.36 ft (1000...4000 m) 1 % per 100 m
Relative humidity	5…95 % non condensing without dripping water IEC 60068-2-3
Maximum acceleration under vibrational stress (during operation)	10 m/s² at 9...200 Hz
Maximum acceleration under vibratory load (during storage)	10 m/s² at 9...200 Hz
Maximum acceleration under vibratory load (during transport)	10 m/s² at 9...200 Hz
Maximum deflection under vibratory load (during operation)	3 mm at 2-9 Hz
Maximum deflection under vibratory load (during storage)	3 mm at 2-9 Hz
Maximum deflection under vibratory load (during transport)	3 mm at 2-9 Hz
Maximum acceleration under shock impact (during operation)	100 m/s² at 11 ms
Maximum acceleration under shock load (during storage)	100 m/s² at 11 ms
Maximum acceleration under shock load (during transport)	100 m/s² at 11 ms

Ordering and shipping details

Category	US10I1122392
Discount Schedule	0I11
GTIN	3606486007396
Returnability	Yes
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.480 in (6.300 cm)
Package 1 Width	10.630 in (27.000 cm)
Package 1 Length	10.827 in (27.500 cm)
Package weight(Lbs)	3.342 lb(US) (1.516 kg)

Unit Type of Package 2	S06
Number of Units in Package 2	40
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	153.221 lb(US) (69.500 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**180 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**92 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.2 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**88 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.2 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again


Repack and remanufacture

Circularity Profile	**End of Life Information**
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings


Dimensions

Soft Starter

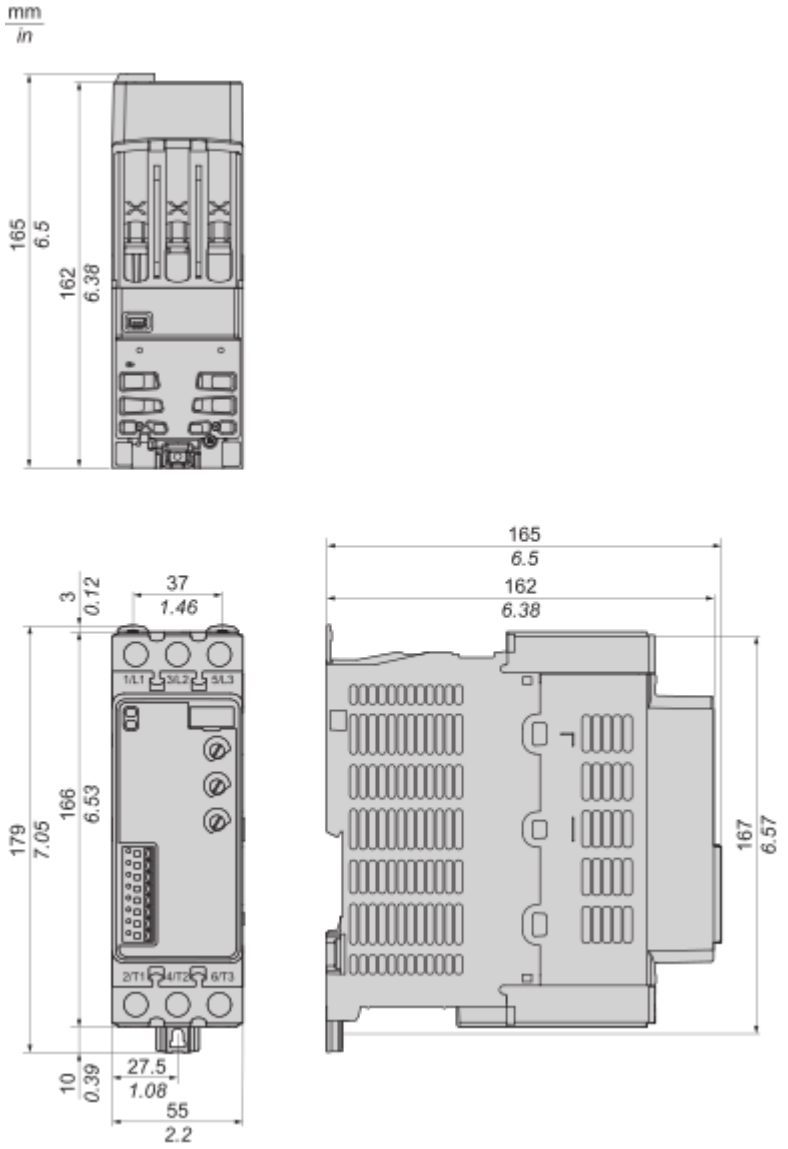

Dimensions


Soft Motor Starter

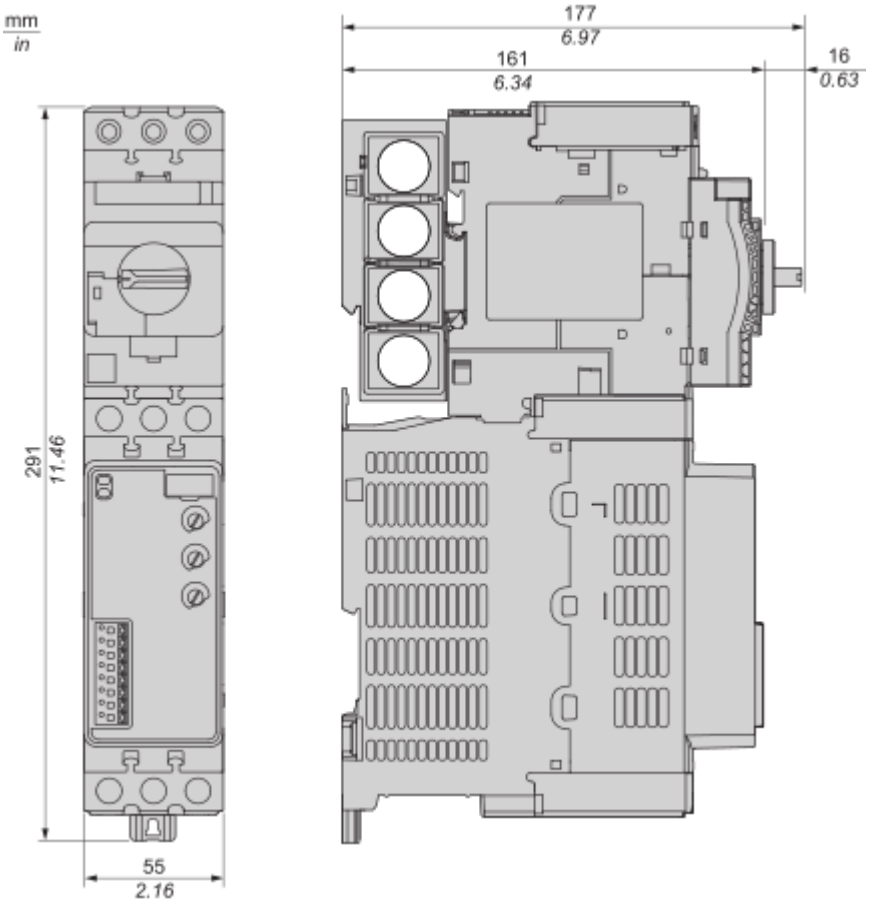


Mounting and Clearance

Mounting


ATS130 Standalone

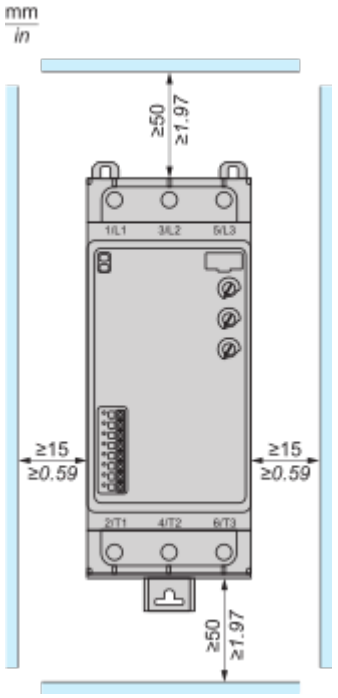

ATS130 Side by side

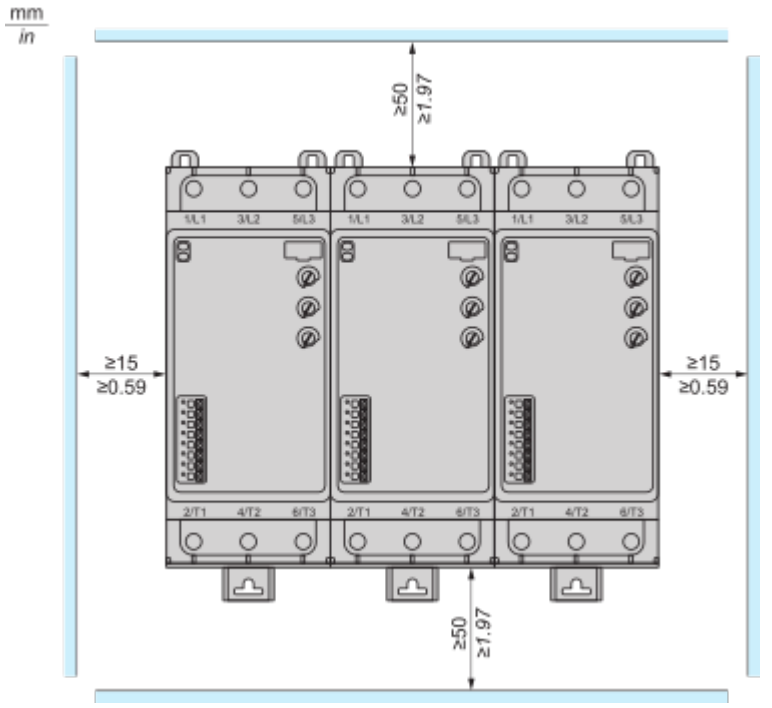


ATS130 Soft Motor Starter (ATS130 + TeSys Deca circuit breaker)

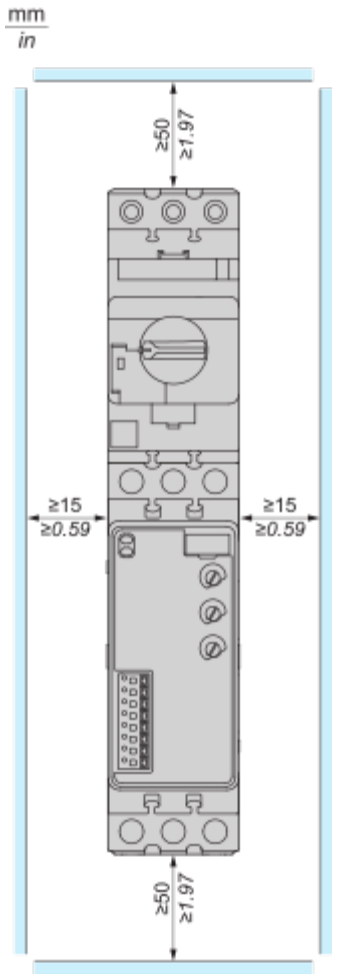
mm
in
≥50
≥1.97
≥15
≥0.59
≥15
≥0.59
≥50
≥1.97

Connections and Schema

Wiring

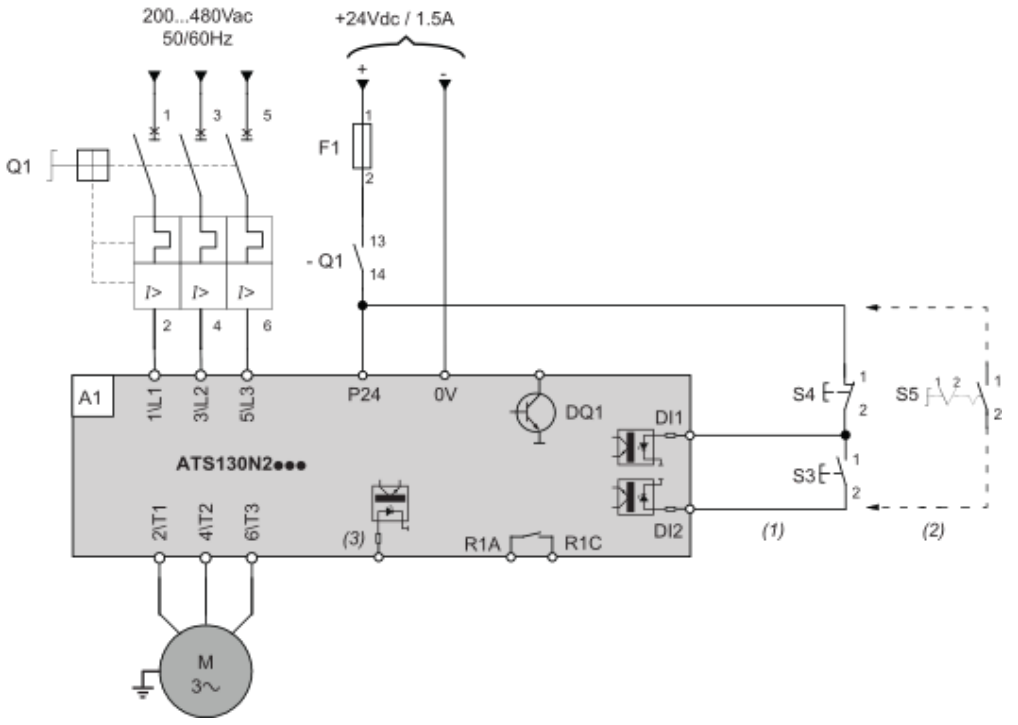


NOTE: Set the potentiometer **Stop Time (s)** to 0 to get a freewheel.

(1): 3-Wire control
(2): 2-Wire control
(3): BOOST

Designation	Component	Description
Q1	Circuit breaker	Thermal-magnetic motor circuit breaker
– Q1	Auxiliary contact of the circuit breaker Q1	Normally open auxiliary contact
F1	Fuse	Short circuit protection of the 24Vdc control supply
S3	Normally open push-button	RUN order
S4	Normally closed push-button	STOP order and freewheel or controlled stop
S5	Selector switch, 2 positions, normally open contact	RUN/STOP command for 2–wire control

Wiring

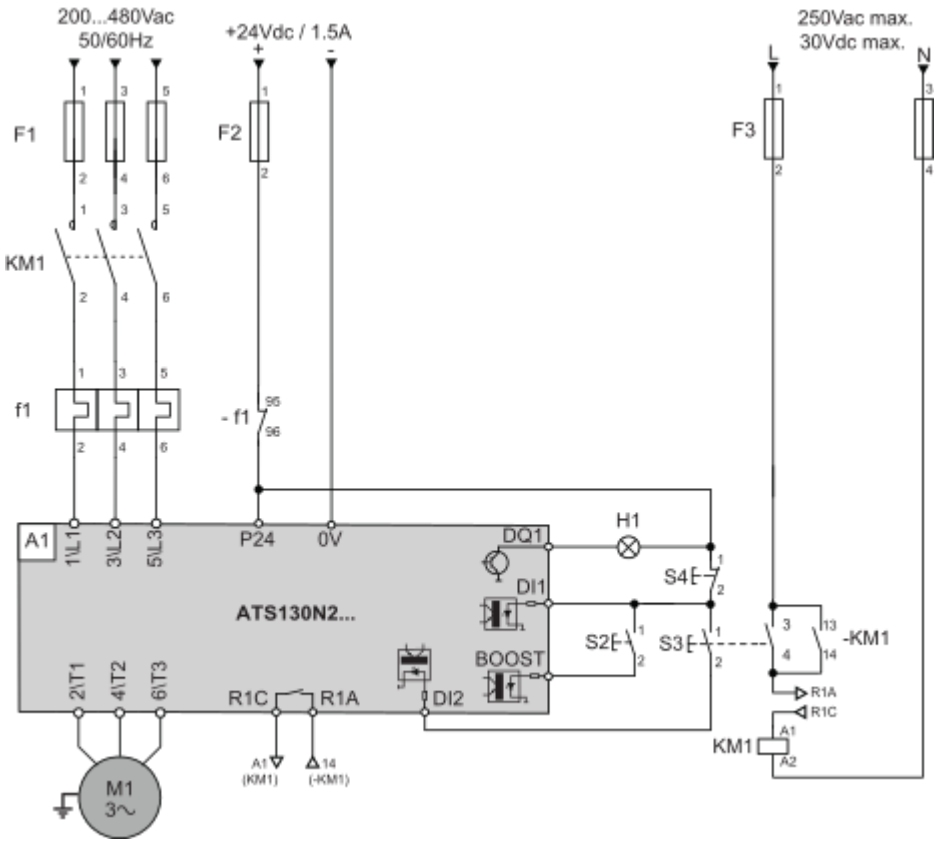

NOTE: Set the potentiometer **Stop Time (s)** to 0 to get a freewheel.

Designation	Component	Description
F1	Fuses	Short circuit protection device for the mains
KM1	Contactor	Line contactor
–KM1	Auxiliary contact of the contactor	Auxiliary contact of the contactor on the command part
f1	Motor overload relay	Thermal protection device for the motor
– f1	Auxiliary contact of the motor overload relay	Auxiliary contact of the motor overload relay F1 inserted in the control circuit
F2	Fuse	Short circuit protection of the 24Vdc control supply
F3	Fuses	Short circuit protection of the control supply
S2	Normally open contact push-button.	RUN command for BOOST command
S3	Normally open contact push-button.	RUN command for 3-wire control
S4	Normally closed contact push-button	STOP command for 3-wire control

Designation	Component	Description
H1	Light	Presence of current

Image of product / Alternate images

Alternative









